

CG TRADING

HVAC valves & sensors



ONE STOP SHOP FOR

- HVAC & R
- MEP
- FIRE FIGHTING
- Industrial Valves

Honeywell

An ISO Certified Company

SIEMENS

Johnson
Controls

Danfoss

BELIMO

Baumer
Passion for Sensors

Easyflex TM

KITZ

L&T Valves

ADVANCE VALVES
Changing the way you think about valves

Mo.: 95101 33345 / 63533 55638
Mail: sales@cgtrading.in
web.: www.cgtrading.in



All Things HVAC & R



Forged Brass Ball Valve**BA-HIPL Series**

- Nominal Pressure : PN 16 / PN 25
- Sizes : 15mm to 50mm
- Chrome Plated Brass Ball
- Full Port Design

Wafer Type Manual Butterfly Valve**BS-HWC4 / BS-MWC4 Series**

- Nominal Pressure : PN 16 / PN 25
- Sizes : 40mm to 600mm
- Cast Iron Body
- DI / SS Disc
- Operated by Lever or Gear Box

Manual Balancing Valve**VHS Series**

- Nominal Pressure : PN 16
- Sizes : 15mm to 50mm
- High Kv Valves
- Numeric Hand Wheel
- Self / Sealing Test Ports
- Screwed End Connection
- Zero Leakage & Complete Close Design

Manual Balancing Valve**V4-BLV Series**

- Nominal Pressure : PN 16
- Sizes : 50mm to 600mm
- Cast Iron Body
- SS Disc
- Operated by Hand Wheel
- Flanged End Connection

Dual Plate Check Valve**BSV4-CWD Series**

- Nominal Pressure : PN 16 / PN 25
- Sizes : 50mm to 600mm
- Cast Iron Body
- DI / SS Disc
- Wafer Type Connection

Y Strainer**YS-SL Series**

- Nominal Pressure : PN 16 / PN 25
- Sizes : 15mm to 600mm
- CI Body with Powder Coating
- SS 304 Filter Screen
- Flanged End / Screwed End Connection

FCU PICV Kit**VPI Series**

- Sizes : 15mm to 32mm
- Plug & Play Design
- Pre Assembled & Insulated
- On-Off / Modulating

Pressure Reducing Valve**D06F/D19/D115S Series**

- Nominal Pressure : PN 16 / PN 20
- Sizes : 15mm to 300mm
- Screwed End / Flanged End
- Diaphragm / Piston Type
- Pilot Operated Main Valve

Motorized Butterfly Valve**BSBFW Series**

- Nominal Pressure : PN 16 / PN 25
- Sizes : 50mm to 600mm
- Wafer Type
- CI Body
- DI / SS Disc

Actuator**EM / NOM Series**

- On-Off / Modulating Control
- Feed Back Signal
- 230V 50/60Hz
- IP 67

2 & 3 way Globe Valve**V5011B Series**

- Nominal Pressure : PN 16
- Sizes : 15mm to 50mm
- Brass / SS Body
- Water & Steam Application
- Low Leakage Rate
- Screwed End Connection

**Actuator****ML 7420 / ML 8824 Series**

- Easy & Quick Installation
- Direct Coupled Actuator
- Manual Operation Knob
- 0-10 VDC / 4-20 mA Output
- Position Feedback Signal

**2 & 3 way Globe Valve****V5329 / V5GV2 / V5050 Series**

- Nominal Pressure : PN 16
- Sizes : 50mm to 150mm
- Cast Iron Body with Flanged End Connection
- Metal Seating of Valve Seat for Long Life Span
- Equal Percentage Flow

**Actuator****ML 7421 A / ML 7421B / ML 8824 Series**

- Low Power Consumption
- Direct Coupled Actuator
- Maintenance Free
- 0-10 VDC / 4-20 mA Output

**3 way Rotary Valve****V5433A / DR Series**

- Nominal Pressure : PN 6
- Sizes : 15mm to 150mm
- Screwed End / Flanged End
- Cast Iron Body
- Compact Design
- Reliable Mounting for Electrical Actuators

**Actuator****CN Series**

- Feedback : Yes
- Non Spring Return
- Torque : 5 Nm to 34 Nm
- 0-10 VDC / 4-20 mA Output

**2 way Control Ball Valve****VBA 16 P/F Series**

- Nominal Pressure : PN 16
- Sizes : 20mm to 150mm
- SS Ball & Stem
- Screwed End / Flanged End
- High Flow Capacity
- Equal Percentage Flow Characteristic

**Actuator****MVN Series**

- On-Off / Modulating Control
- 230V / 24V Power Supply
- IP 54
- Torque : 5 Nm to 34 Nm

**Pressure Independent Control Valve****VPI Series**

- Nominal Pressure : PN 16 / PN 25
- Sizes : 15mm to 250mm
- DZR Brass / CI Body
- With & Without Pressure Test Port
- Simple Maintenance
- Compact One Unit PIBC Including Modulating Control Valve, Dynamic Flow Limiter & Differential Pressure Control Valve in one Body

**Actuator****MLP / MRP Series**

- On-Off or Modulating Control
- Spring Return / Non Spring Return
- Feedback : Yes
- Control Signal : Analog / Digital
- IP 54



FCU Valve Actuator

VC 4013/6013 Series

- Type : On - Off
- Power Supply : 110 / 220 VAC
- Port : 2 Way / 3 Way
- Sizes : 15mm to 32mm

FCU Valve Actuator

VC 7931 Series

- Type : Modulating
- Power Supply : 24 VAC
- Port : 2 Way / 3 Way
- Sizes : 15mm to 32mm



FCU Valve Actuator

V 4043C/4044C Series

- Type : On - Off
- Action : Spring Return
- Power Supply : 230 VAC
- Port : 2 Way / 3 Way
- Sizes : 15mm to 25mm



FCU Valve Actuator

VS/VN Series


- Type : On - Off / Modulating
- Action: Spring Return
- Power Supply : 220 / 24 VAC
- Port : 2 Way / 3 Way
- Sizes : 15mm to 25mm



FCU Thermostat

T6360A/T6373A Series

- Analog
- Type : On - Off
- Fan Speed : 3 (L/M/H)
- Power Supply : 230 VAC
- Set Point Range : 10°C to 30°C



FCU Thermostat

T6800 Series

- Type : On - Off
- Display : Large LCD
- Configuration : 2 Pipe
- Power Supply : 220 VAC
- Mounting : Horizontal / Vertical



FCU Thermostat

T6861/6865 Series

- Configuration : 2 Pipe / 4 Pipe
- Power Supply : 230V / 24V
- Control : On-Off / Modulating
- Mounting : Horizontal/Vertical
- Display : Large LCD Digital with Backlit

FCU Thermostat

WM Series

- Configuration : 2 Pipe / 4 Pipe
- Power Supply : 220 V
- Control : On-Off / Modulating
- BMS : Modbus Protocol Compatible



AHU Thermostat

T2798I2000 Series

- Display : LCD Backlit
- Power Supply : 24V
- Output : 2-10 VDC, 4-20mA
- Sensor : Compatible with External Sensor



Humidistat

H6000 Series

- Range : 20% to 80%
- Maximum Temperature : 52°C
- Set Point Adjustment : Removable Knob
- Cover : Plastic Locking



IAQ Sensor

HD Series

- Parameters : PM 2.5 / PM 10, CO₂, VOC, Temperature, RH
- BMS : Compatible via Modbus Protocol
- Display : Large 3.5" Touch Screen



Water Flow Switch

WFS 6000 / WFD Series

- Type : Paddle / Vane Type
- Temperature of Fluid : Max 100°C
- Operating Pressure : 10Kgs/cm²
- size : 25mm to 150mm



Damper Actuator

MS Series

- Type : Fire / Air Damper
- Torque : 4Nm, 9Nm, 20Nm
- Control : On-Off / Modulating
- Power : 220V / 24V
- Approval : UL Listed
- Action : Spring Return / Non Spring Return



Pressure Transmitter

DPSN / DPTE Series

- Range : 20Pa - 2500Pa
- Output Signal : 0-10 VDC / 4-20mA
- Media : Air / Water



Variable Frequency Drive

HONVFD Series

- Range : 0.75Kw-90Kw
- Input : Single Phase, 200-240V
- Three Phase, 380-480V
- Accessories : LED Digital Key Board
- LCD Key Pad
- Communication : Standard Modbus
- Profibus-DP & CAN OPEN



Airvent Valve

E 121 Series

- Pressure : Max 10 bar
- Size : 3/8", 1/2"
- Temperature : Max 110°C



T + RH Sensor

H 7080B Series

- Mounting : Duct Type
- Power : 24V
- Accuracy : 2%, 3%, 5% RH
- Range : 0-100% RH
- Temperature : -10°C to 70°C
- Input Signal : 4-20mA / 0-10 VDC or Resistance Output for Temperature

Universal Controller

UB Series

- Display : Large
- Power : 24V
- Input Signal : NTC 20K, NTC 10K, PT 1000 & 0-10VDC
- Output Signal : 0-10VDC, 2-10VDC





2 & 3 way Globe Valve

VVG 44 / VXG 44 / VXG 48 Series

- Nominal Pressure : PN 16
- Sizes : 15mm to 40mm
- Bronze / CI Body
- Temperature : 1°C to 120°C
- Screwed End Connection



Actuator

SAS Series

- On-Off / Modulating
- 230V / 24V
- Spring Return / Non Spring Return
- Position Feedback : 0-10VDC



2 & 3 way Globe Valve

VVF 47 / VXF 47 Series

- Nominal Pressure : PN 16
- Sizes : 50mm to 150mm
- Grey Cast Iron Body
- Temperature : 1°C to 95°C
- Flanged End Connection



Actuator

SBX / SBV Series

- On-Off / Modulating
- 230V / 24V
- Position Feedback : 0-10VDC, 4-20mA
- Stroke : upto 80mm=20mm & 100mm to 150mm=40mm
- Available with External Converter



2 & 3 way Globe Valve

VVF 42 / VXF 42 Series

- Nominal Pressure : PN 16
- Sizes : 15mm to 150mm
- Grey Cast Iron Body
- Temperature : -10°C to 95°C
- Flanged End Connection



Actuator

SAX / SKD / SKB / SKC Series

- Spring Return / Non Spring Return
- On-Off / Modulating
- 230V / 24V
- Position Feedback : 0-10VDC, 4-20mA
- BMS : Modbus Protocol Actuators also Available
- UL Approved Models also Available



Motorized Butterfly Valve

VKF 42 Series

- Nominal Pressure : PN 16
- Sizes : 50mm to 600mm
- Grey Cast Iron Body
- Disc : Nodular Cast Iron / SS
- Temperature : -10°C to 80°C



Actuator

SQL / GEB / GBB / GIB Series

- Control : On-Off / Modulating
- Power Supply : 230V / 24V
- Position Feedback : 0-10VDC
- Torque : 15 Nm to 2650 Nm
- Operation : Handwheel & Position Indicator



2 & 3 way Globe Valve

VVP 45 / VXP 45 Series

- Nominal Pressure : PN 16
- Sizes : 10mm to 40mm
- Bronze Body
- Temperature : 1°C to 110°C
- Screwed End Connection



Actuator

SSB / SSC Series

- On-Off or Modulating
- 230V / 24V
- Control Signal : 0-10VDC



2 & 3 way Ball Valve

VAI 61 / VBI 61 Series

- Nominal Pressure : PN 40
- Sizes : 15mm to 50mm
- Brass Body
- Temperature : -10°C to 120°C
- Screwed End Connection



Actuator

GLB / GDB / GMA Series

- On-Off / Modulating
- 230V / 24V
- Spring Return / Non Spring Return
- Position Feedback : 0-10VDC
- Modbus Actuators also Available



2 way PIBC Valve with Actuator

VPI 46 VQI 46 Series

- Nominal Pressure : PN 25
- Sizes : 10mm to 50mm
- DZR Brass / Graphite Iron Body
- Internal / External Thread
- With & without Pressure Test Port



VPF 43 VPF 44 Series

- Nominal Pressure : PN 16 & PN 25
- Sizes : 50mm to 200mm
- Grey Cast Iron / Nodular Cast Iron Body
- Temperature : 1°C to 120°C
- With Pressure Test Point



SSA / STA SBX / SAY SBY Series

- On-Off / Modulating
- Thermal / Electric
- 230V / 24V
- Spring Return / Non Spring Return
- With/Without Position Feedback



FCU Valve with Actuator

VVI 46 / VXI 46 Series

- Nominal Pressure : PN 16
- Sizes : 15mm to 25mm
- Brass Body
- Internal Thread Connection




SUA / STA / STP Series

- On-Off / Modulating
- Thermal / Electric
- 230V / 24V
- Spring Return / Non Spring Return



MVI / MXI Series

- 230V
- On-Off
- Sizes : 15mm to 25mm
- SS / Brass Body
- Spring Return
- Internal Thread Connection



Control Valve with Magnetic Actuator

MXG / MXF Series

Nominal Pressure : PN 16
Sizes : 15mm to 100mm

- Operating Voltage : 24VAC
- Screwed End / Flanged End
- Position Signal : 0-10VDC, 4-20mA
- Time : Fast Positioning
- Stroke : High Resolution
- Flow : Equal Percentage or Linear Valve Characteristic



Damper Actuator

GQD / GLB / GNA / GGA Series

- Fire Damper / Air Damper
- On-Off / Modulating
- 24V / 230V
- With / Without Auxillary Switch
- Torque : for Air=2Nm to 250Nm
for Fire & Smoke=4Nm to 18Nm



AHU & VAV Thermostat

RDU 340

- Type : Modulating
- Power Supply : 24 VAC
- Control Output : 0-10VDC
- Mode : Comfort Energy Saving & Protection

FCU Thermostat

RDF 340

- Type : Modulating
- 3 Fan Speed Control
- Power Supply : 24 VAC
- Control Output : 0-10VDC
- 2 Multi Function Input for Key Card Contact, External Sensor



FCU Thermostat

RDF 300 Series

- Power Supply : 230 VAC
- Display : Backlit LCD
- 3 Fan Speed Control
- Control Output : 0-10VDC
- Type : On-Off or 3 Position Contact Output
- White & Black Mounting Colors Available



FCU Thermostat

RDF 310.2/MM

- Type : On-Off
- Power Supply : 230V
- 2 Pipe Fan Coil Unit
- 3 Fan Speed Control



FCU Thermostat

RDF 510/530 Series

- Type : On-Off
- Power Supply : 230V
- 2 Pipe & 4 Pipe Fan Coil Unit
- 3 Fan Speed Control
- Comfort & Protection Operating Mode
- Available in Different Colors



FCU Thermostat

RDG 100 Series

- Type : On-Off / Modulating
- Power Supply : 230V / 24V
- Display : Backlit
- 3 Multi Function Input for Key Card Contact, External Sensor etc
- Infrared Control Remote Receiver



FCU Thermostat

RDF 302

- Power Supply : 230V
- Display : Backlit
- RS 485 Communicative Interface in Modbus
- Output for 3 Speed or 1 Speed Fan
- 2 Multi Function Input for Keycard Contact External Sensor etc



FCU Thermostat

RAB 21

- Power Supply : 230V
- Control : On-Off / 2 Position Control
- Room Thermostat for Heating or Cooling
- Manual 3 Speed Fan Switch



Duct Type T+RH Sensor

QFM Series

- Operating Voltage : 24 VAC
- Signal Output : 0-10 VDC / 4-20mA for Humidity & Temperature
- Measuring Accuracy : +/- 2% / 3%
- With Display & Without Display Available



Wall Mount T+RH Sensor

QFA Series

- Operating Voltage : 24VAC
- Signal Output : 0-10 VDC / 4-20mA for Humidity & Temperature
- Measuring Accuracy : +/- 2% / 3%
- With Display & Without Display Available



Duct Temperature Sensor

QAM Series

- Operating Voltage : 24VAC
- Active & Passive Sensor
- Signal Output : 0-10 VDC / 4-20mA
- Probe Length : 2.0m/4.0m/6.0m



Immersion Type Temperature Sensor

QAE Series

- Operating Voltage : 24VAC
- Signal Output : 0-10 VDC / 4-20mA
- Active & Passive Sensor
- Immersion Length : 100mm & 150mm
- Comes with additional protection pocket



Water Differential Pressure Sensor

QBE Series

- Operating Voltage : 24VAC
- Signal Output : 0-10 VDC / 4-20mA
- Pressure Range Available from 0-16 Bar
- Protective Degree of Housing IP 65



Air Differential Pressure Switch

QBM 81 Series

- To Maintain Air Filter, Air Flow, Fan Belt
- To Maintain Pressure in Clean Room, Kitchen etc
- Range Available 20 To 5000Pa



Air Differential Pressure Switch

QBM Series

- Operating Voltage : 24VAC
- Signal Output : 0-10 VDC
- Range Available : -50 To 3000Pa
- With & Without Display available



Air Velocity Sensor

QVM 62.1 / HE

- Operating Voltage : 24VAC
- Signal Output : 0-10 VDC / 4-20mA
- Range Available : 0-5 m/s, 0-10 m/s & 0-15 m/s



Universal Controller

RWD Series

- Operating Voltage : 24V
- Two Universal Input for NI1000/PT1000 Temperature Sensor and DC 0.10V Signal
- Two Modulating Output with DC 0..10V Signal Output



IAQ Sensor

QNA Series

- PM 2.5 Sensor
- CO₂, VOC T + RH
- Light, Level & Noise



Rotary Damper actuator fail-safe / spring return

NFA-S2 , SFA-S2, LF24

- Rotary actuator fail-safe
- 2 x SPDT
- IP 54
- AC/DC 24 V



Rotary Air Damper actuator

LM24 /230.., NM24 / 230.., SM24 /230..,GM 24/230..

- Rotary actuator for damper
- IP 54
- AC/DC 24 V / AC 100...240 V



2-way 3-way globe valve

H780... +EV24A-SZ-TPC

- 0 - 150 C Temperture
- 2-way & 3-way globe valve
- 15 mm to 250 mm size



Pressure Independent Control Valves - EPIV

- Nominal voltage AC/DC 24 V
- Control modulating, communicative
- For closed cold and warm water systems
- For modulating control of air-handling and heating systems on the water side



Touch Keypad Room Thermostat

EXT-MC...,P-22RTH..

- For measuring the temperature, humidity and CO₂ in the room and adjusting temperature
- AC/DC 24 V
- CO₂ 0...2000 ppm
- humidity 0...100% RH



Humidity / Temperature Duct sensor

22DTH-11..

- sensor (0...10 V) for measuring the relative or absolute humidity and temperature in duct applications
- IP65 / NEMA 4X rated enclosure.



Rotary Motorized Ball Valve

R20.. & R30.. series

- For open and closed cold and warm water system
- On- Off / Modulating
- 2 way and 3 way



Characterised control valve

R20.. & R60.. series

- For open and closed cold and warm water system
- On- Off / Modulating
- 2 way and 3 way



Motorized Butterfly Valve

D6..N series

- Nominal Pressure : PN 16 / PN 25
- Sizes : 50mm to 600mm
- Wafer Type
- CI Body
- DI / SS Disc



Actuator for Butterfly valve

- PRCA , GRC, GR, DR and SY series for Butterfly valve IP67 & IP54 24/230v

- On-Off / Modulating Control
- Feed Back Signal
- 230V 50/60Hz
- IP 67



2 & 3 way Control Valve

VG Series Valve VA Series Actuator

- Nominal Pressure : PN 40
- Sizes : 15mm to 50mm
- Brass Body
- Voltage : 24V
- Feedback Signal : 0-10 VDC
- On-Off / Modulating



Motorized Butterfly Valve with On Off Actuator

VF Series Valve VA Series Actuator

- Nominal Pressure : PN 16
- Sizes : 50mm to 1000mm
- On-Off / Modulating
- 230V, 50/60 Hz
- Feedback Signal
- IP 67



2 way PIBC Valve

VPMF Series Valve VA 7 Series Actuator

- Nominal Pressure : PN 16 & PN 25
- Sizes : 15mm to 150mm
- On-Off / Modulating
- With Port / Without Port
- Thermal or Electric Actuator



BTU Meter

RLBC Series

- 8 Digit Display
- Type : 20mm - 150mm = Ultrasonic
< 150mm = Electromagnetic
- Communication : M-Bus / Modbus
- Connection : Threaded / Flanged
- Encloser Rating : 20 - 40mm = IP68, 50-150mm = IP54
- Material : 20-40mm = Brass, 50-150mm = Cast Iron



Water Flow Switch

FS-80-C

- Sizes : 25mm to 150mm
- Type : Paddle
- Temperature Fluid : -25°C to 110°C
- Encloser : IP 55



Damper Actuator

M91 Series

- Torque : 4Nm, 8Nm, 16Nm, 24Nm
- Type : Fire / Air Damper
- Power : 24 V
- Connectrol : On Off / Modulating
- Action : Spring Return / Non Spring Return

T + RH Sensor

HT 7000 Series

- Power : 15-35 VDC / 24VAC
- Mounting : Duct Type / Wall Mount
- Range : 0-100% RH
- Temperature : -40°-60°C
- Input Signal : 4-20 mA / 0-10 VDC



DPT

DPT 7000 Series

- Range : 100Pa-10000Pa
- Output Signal : 0-10 VDC / 4-20 mA
- Media : Air and Natural Gas



Actuator

VA7010-8503-C

- 230V
- Spring Return
- On Off




- 230V
- 2 Pipe, 4 Pipe
- 3 Fan Speed Control
- Key Card Contact Available
- Display : LCD White Backlit

Thermostat



Pressure Independent Balancing Valve

AB-QM Series Valve with AME Actuators

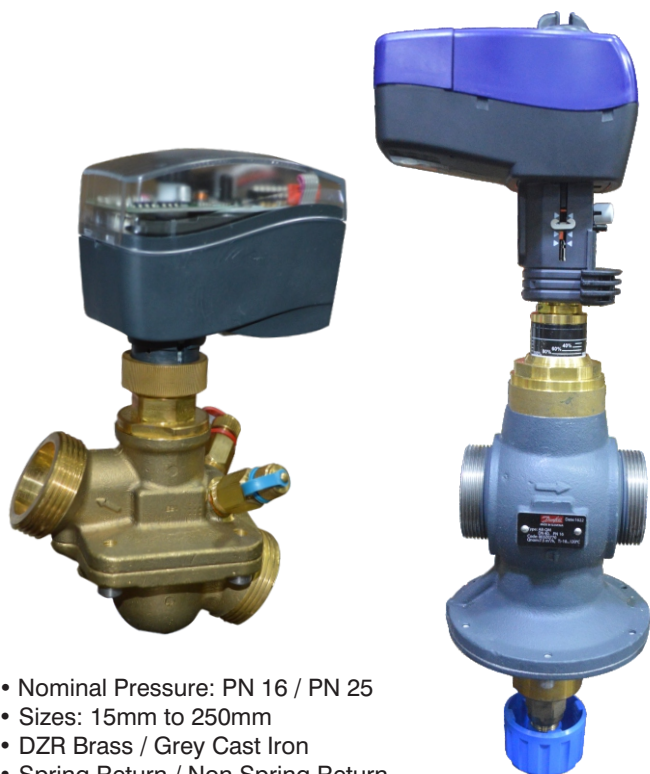

- Nominal Pressure: PN 16 / PN 25
- Sizes: 15mm to 250mm
- DZR Brass / Grey Cast Iron
- Spring Return / Non Spring Return
- 230V / 24V
- On-Off / Modulating
- With Feedback Signal 0-10 VDC, 4-20mA

2 & 3 way Globe Valve

VRG / VF Series Valve with AME Actuators

- Nominal Pressure: PN 16
- Sizes: 15mm to 150mm
- Screwed End / Flanged End
- 230V / 24V
- On-Off / Modulating
- Spring Return / Non Spring Return
- 0-10VDC / 4-20mA



Manual Balancing Valve

MSV Series

- Nominal Pressure : PN 16 / PN 25
- Sizes : 15mm to 400mm
- Screwed End / Flanged End
- DZR Brass Upto 50mm
- Cast Iron above 65mm to 400mm



AHU Thermostat

REPI Series

- Power Supply : 24V
- Output : 0-10 VDC / 4-20mA
- Remote Sensor
- 3 Fan Speed Control
- Heating Cooling Function



Expansion Bellow

Easyflex™



- Nominal Pressure : PN 10 / PN 16
- Sizes : 20mm to 1800mm
- MOC : Rubber & SS Bellow
- Construction : Single Arch / Double Arch

Flanged End Manual Balancing Valve

Cast Iron body, EN3Epoxy coated Disc, SS-410 Spindle, manual Hand wheel Operated, with Dual Test Ports, EPDM Lined suitable to PN-16.



Nominal Pressure: PN 16 / PN 20

- Sizes: 15mm to 300mm
- Cast Iron Body
- Hand wheel Operated
- Dual Test Ports
- EPDM Lined suitable to PN-16

Manual Butterfly Valve



- Nominal Pressure : PN 10 / PN 16
- Sizes : 15mm to 600 mm
- Wafer Type centric design
- Nylon Coated and SS disc
- Gear Operated and Lever Operated

Manual Balancing Valve

Screw End , Gunmetal Body



- Nominal Pressure : PN 16 / PN 20
- Sizes : 25 mm to 50mm
- Female Screwed type Balancing Valve having Gun Metal body, Nylon coated Hand wheel operated, with Dual Test Ports suitable to PN-16.

Dual Plate Check valve - NRV

Wafer Type Dual Plate Non-Return valve having Cast iron body with SS-410 plates & Hinge / Stop Pin, EPDM Lined suitable to PN-16

- Optimum Spring Design for more than 1 million cycles.
- Soft Seated and Metal to Metal Seated.
- Long Life and Trouble Free Operation
- No water Hammering
- Can be Use in Any direction



Pressure Gauge with Accessories



- Sizes : 100mm / 150mm
- Connection : 3/8" / 1/2"
- MOC : MS / SS
- Range :
0-7Kg, 0-10Kg,
0-16Kg, 0-21Kg, 0-40Kg

Ball Valve

- Sizes : 10mm / 15mm
- MOC : Brass



Needle Valve

- Sizes : 3/8", 1/2"
- MOC : SS
- Pressure : 3000psi



Siphon

- Type : U & Q
- MOC : MS / SS
- Connection : 3/8" / 1/2"



Temperature Gauge with Accessories



- Type : Dial / Sikka
- Dial Sizes : 100mm / 150mm
- MOC : MS/SS/Brass
- Range : 0°-50°C, 0°-100°C



Thermowell

- Available Length: 4", 6", 8"
- MOC : SS
- Connection : 1/2"

Electrothermic actuator 22CX



Electrothermic actuator compact design with on/off action compatible with thermostatic adaptable valves, fan coil valves, manifolds.

Technical Features

Power consumption: 1,8W

Protection class: IP54

Actuator stroke: 3.5 mm

Valve stroke: 2,5 mm

Version 230V: 90 sec. (start).- 3 min. (end)



Two-way Three-way brass valve for fan-coils



fan coil control valves are used for controlling the flow of hot or cold water in heating and air conditioning systems. They are operated by actuators with effective stroke of 2.5 mm, such as the 22C, 22CX, and 26LC Series electrothermal actuators.



Water Flow Switch


CT-WFS Series



- Type : Paddle / T Type
- Temperature of Fluid : Max 100°C
- Operating Pressure : 10Kgs/cm²
- Sizes : 25mm to 150mm

FCU Motorised Valve

CT 01/02 Series

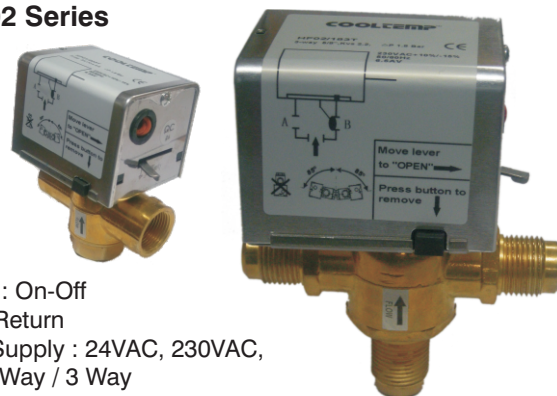


- Control : On-Off
- Spring Return
- Power Supply : 24VAC, 230VAC,
- Port : 2 Way / 3 Way
- Sizes : 5/8", 1/2", 3/4", 1"

FCU Valve Station

- -
 -
- Sizes: 15mm, 20mm, 25mm

Can be Equipped with Flexible Hoses

Available with On-Off Valve, Modulating Valve, PIBC Valve

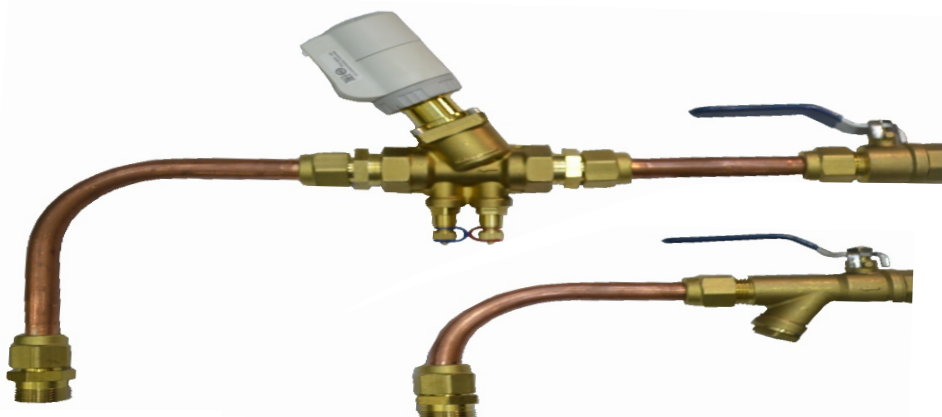

Switches, Transmitters & Diff Pressure Gauges

OMCON

DPS

OM 400 Series



- Range :
- 20 To 300Pa
- 50 To 500Pa
- 200 To 1000Pa
- 500 To 2500Pa

DPT

OM 108 Series



- Range :
- 0 To 100Pa
- 0 To 250Pa
- 0 To 500Pa
- 0 To 1000Pa
- 0 To 2500Pa
- 0 To 5000Pa
- 0 To 10,000Pa
- Output : 0-10VDC / 4-20mA

Magnehelic Gauge

OMB Series



- Range :
- 50 to 50 Pa
- 0 to 30 Pa
- 0 to 60 Pa
- 0 to 100 Pa
- 0 to 25 mmwc
- 0 to 50 mmwc
- 0 to 100 mmwc
- Measuring : Pa & mmwc

Super Stockists





Honeywell
An ISO Certified Company

SIEMENS

Johnson
Controls

Danfoss

BELIMO[®]

KITZ

 **Baumer**
Passion for Sensors


H. GURU

Easyflex[™]

 **L&T Valves**

WATTS[®]

 **ADVANCE VALVES**

website: www.cgtrading.in

Mail : sales@cgtrading.in

call : 95101 33345 / 63533 55638